

GENERAL NOTES

1. FOUNDATIONS MUST BE LEVEL/IN-LINE.
2. GATE MUST RUN LEVEL.
3. THERE MUST BE A MINIMUM CLEARANCE OF 100mm FROM THE ROAD TO THE BOTTOM OF THE GATE.
4. DUCT MUST BE RUN TO RECEIVER FROM PHOTOCELL.
5. IF IN DOUBT, PLEASE ASK!

DIMENSIONS & SPECIFICATIONS

FOUNDATIONS:
RECOMMENDED CONCRETE:
MAIN TOWER:
 L = 1300mm
 H = 1000mm.
 W = 1300mm.


POWER REQUIREMENTS

240v SINGLE PHASE SUPPLY,
 50hz 10A MCB,
 or 300mA RCD Type C Breaker

BOLT INFORMATION

INCLUDED—
MAIN TOWER:
 4 x M20 THREADED BAR WITH WASHER & NUT FOR ADJUSTMENT

OPTIONS

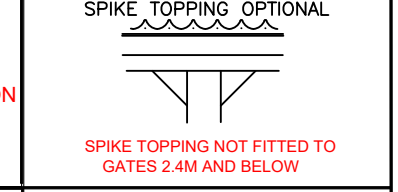

1.	Revision 01	
No.	Revision/Issue	

XM CLEAR OPENING — XM HEIGHT LH
 DIAMOND BAR INFILL
 COLOUR:
 ORDER REFERENCE:
 ORDER NUMBER:
 GEARBOX TYPE: HD

Dwg Number: BI-FOLD	Sheet 1.
------------------------	-------------