

PF4000 Turnstiles (Single)

PF4000S



Product Information

Specification

UKCA + CE Approved

Material Construction

Standard Galvanised

Duty Cycle

100% Heavy Industrial Usage


Description

The 4000 Full Height Turnstile range is a high specification turnstile, suitable for controlling access in environments such as reception areas, schools, public building and military bases. Our Turnstiles seamlessly form part of high level perimeter security, requiring low usage knowledge.

Constructed from Mild or Stainless Steel for long lasting and maintenance free performance, the 4000 offers a comprehensive range TURNSTILES of features to suit individual client requirements, including 90o or 120o rotor assemblies, canopies, down lights and fire alarm activation (to engage free rotation).

Turnstiles can be configured as bi-directional or single direction only. The 4000 turnstile range is available in single or double according to your requirements. The units are ready to bolt down and commission continuing our "Plug & Play" ethos.

Due to our superior intelligent yet simple, PLC controller. The turnstile can be configured for "Fail Safe" or "Fail Secure" modes on the event of power failure. Options also extend to varying height configuration, again tailored to suit your needs.

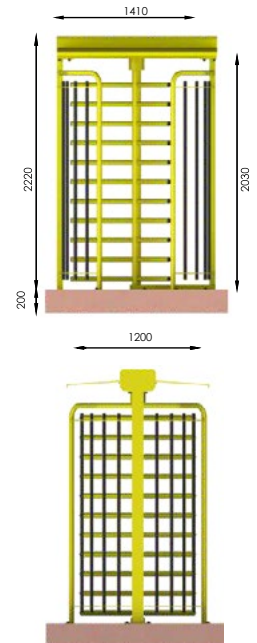

Safety system

Built in as standard is an anti-trap safety system to stop the possibility of users getting trapped in the turnstile

Superior mechanism

The 4000 turnstiles features an ultra smooth and reliable Locinox Head Mech unit

Specific product info

Flow Rate

15 to 22 Person Per Minute in Single Direction Fail Safe or Fail Secure Modes Available

Duty Cycle

100% Heavy Industrial Usage Suitable for Indoor & Outdoor Usage

Specification

UKCA + CE Approved

Power Requirements

Single Phase 240v 50Hz 5 Amps

Colours

All RAL Colours Available (Galvanised Optional Cost)

Dimensions

Single: 1280mm D x 1400mm W x 2225mm H

Sizes

Rotor: 76mm Tube with Bottom Supported Bearing Arms: 42mm Tube with Capped Ends Side Frames: 33mm Tube Welded to Curve Base Plate

Material Construction

Standard Galvanised

Unit Weight

230Kg Approx
*All turnstiles are bespoke and manufactured to order.

Key Features

- Ease of installation
- Low maintenance
- Compatible with most access control systems
- Reader Plates Fitted as STD
- Fire Alarm Input pre-configured
- Paxton/Nortech/levo Compat
- Easy to use for end users

Optional Extras

- Pedestrian rain canopies
- Led passage indicators
- Stainless steel rotors
- Different heights available
- Bespoke size reader plates
- Led courtesy down light
- Pedestrian gate combination



Plug + Play Installation